


Specifications

Nominal Voltage		6V
Rated Capacity (20 hour rate)		415AH
Dimension	Total Height (with terminals)	424mm(16.69inches)
	Height	404mm(15.90inches)
	Length	295mm(11.61inches)
	Width	179mm(7.05inches)
Weight		Approx. 55.7 kg (122.8 Ibs)


Discharge characteristics 77°F (25°C)

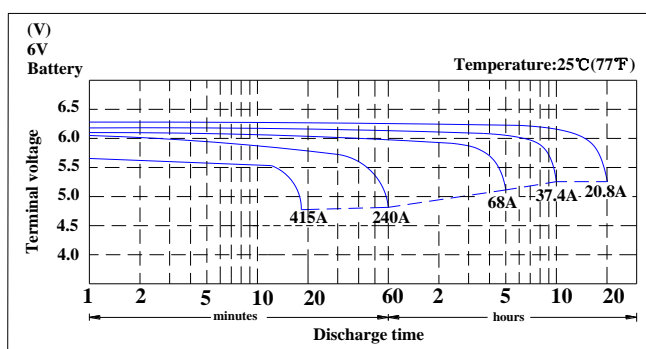

Characteristics

Capacity 77°F (25°C)	20 hour rate (20.8A to 5.25Volts)	415AH
	10 hour rate (37.4A to 5.25Volts)	374AH
	5 hour rate (68A to 5.1 Volts)	340AH
Internal Resistance	Full charged 77°F (25°C)	1.6mΩ
Capacity affected by Temperature (20 hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
Self-Discharge 77°F (25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Standard Terminal	DT	
Max. Discharge Current 77°F (25°C)	2000A (5s)	
Reserve Capacity (Minutes to 5.25V at 80°F (27°C))	@ 25Amps	885Min
	@ 75Amps	229Min
Charging (Constant Voltage)	Cycle	Initial Charging Current 80A Or Small 7.25V~7.45V/77°F (25°C)
	Float	6.8V~6.9V/77°F (25°C)

Duration of discharge vs. Discharge current

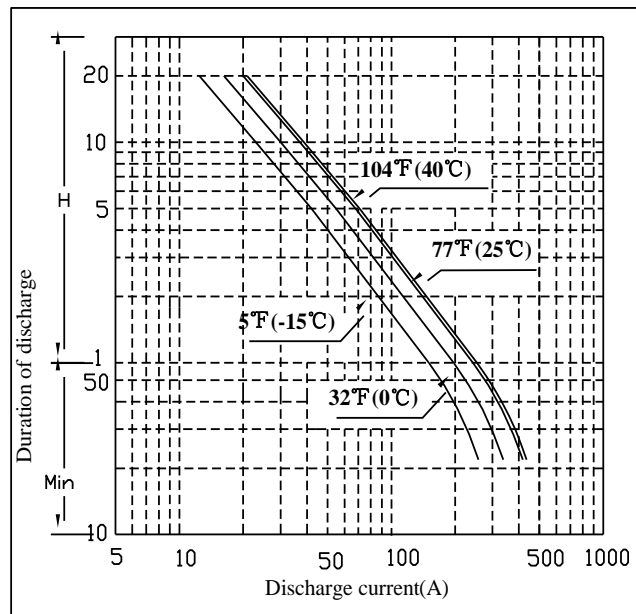

Constant Current Discharge Rating Amperes @ 77 °F (25°C)

Cut off voltage V/cell	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	386.6	285.0	231.5	123.4	93.9	65.9	45.1	37.4	31.8	20.8	17.4