


Specifications

Nominal Voltage		6V
Rated Capacity (20 hour rate)		12AH
Dimension	Total Height (with terminals)	101mm(3.98inches)
	Height	95mm(3.74inches)
	Length	151mm(5.94inches)
	Width	50mm(1.97inches)
Weight		Approx.1.84kg (4.05lbs)


Discharge characteristics 77°F (25°C)

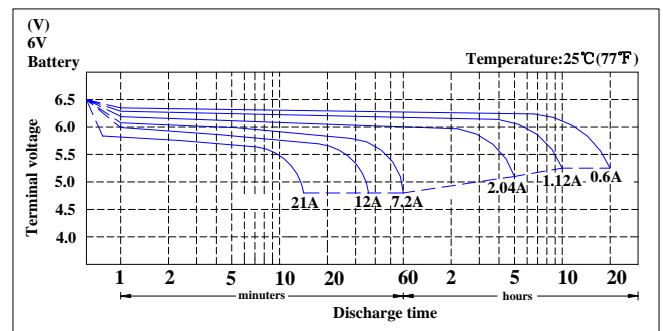

Characteristics

Capacity 77°F (25°C)	20 hour rate (0.6A to 5.25Volts)	12AH
	10 hour rate (1.12A to 5.25Volts)	11.2AH
	5 hour rate (2.04A to 5.1Volts)	10.2AH
	1 hour rate (7.2A to 4.8Volts)	7.2AH
Internal Resistance	Full charged 77°F (25°C)	7m Ω
Standard Terminal	F1	
Capacity affected by Temperature (20 hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
Self-Discharge 77°F (25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Max. Discharge Current 77°F (25°C)	180A (5s)	
Maximum Charge Current(A)	2.4A	
Charging (Constant Voltage)	Cycle	7.25V~7.45V/77°F (25°C)
	Float	6.8V~6.9V/77°F (25°C)
Temperature compensation coefficient of charging voltage (mV/°C/cell)	Cycle	-4mV/°C/cell
	Float	-3mV/°C/cell

Duration of discharge vs. Discharge current

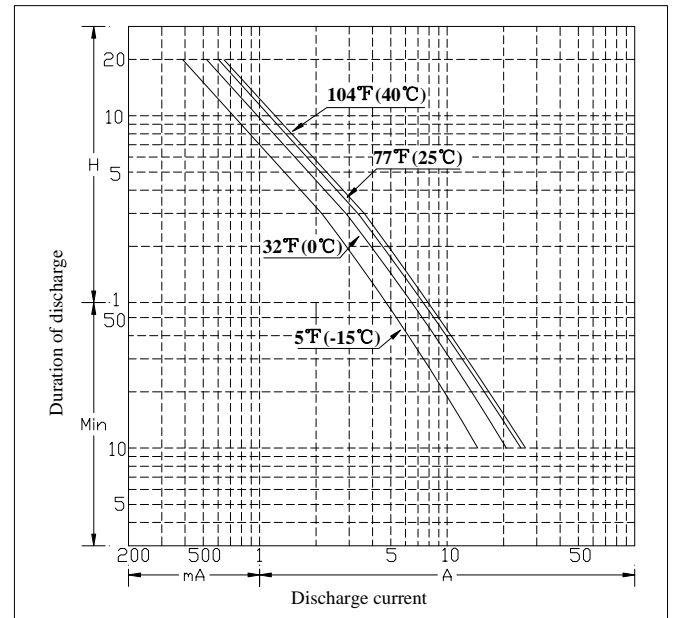

Constant Current Discharge Rating Amperes @ 77°F (25°C)

Cut off voltage V/cell	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	19.63	11.86	8.54	6.91	3.94	2.94	2.03	1.37	1.12	0.95	0.60	0.50

Note The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.