


□ HGL80-12A

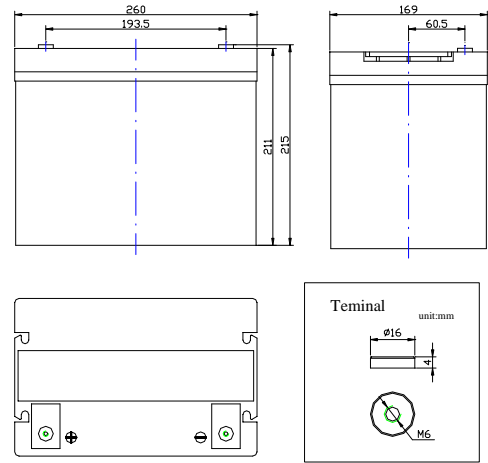


Specifications

Nominal Voltage		12V
Rated Capacity (20 hour rate)		80AH
Dimension	Total Height (with terminals)	215mm(8.46 inches)
	Height	211mm(8.31 inches)
	Length	260mm(10.24inches)
	Width	169mm(6.69inches)
Weight		Approx.23.2kg (50.82lbs)


Characteristics

Capacity 77°F (25°C)	20 hour rate (4A to 10.5Volts)	80AH
	10 hour rate (7.4A to 10.5Volts)	74AH
	5 hour rate (13.6A to 10.2Volts)	68AH
	1 hour rate (48A to 9.6Volts)	46.4AH
Internal Resistance	Full charged 77°F (25°C)	6mΩ
Standard Terminal	M6	
Capacity affected by Temperature (20 hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
	5°F (-15°C)	65%
Self-Discharge 77°F (25°C)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Max. Discharge Current 77°F (25°C)	800A (5s)	
Maximum Charge Current(A)	16A	
Charging (Constant Voltage)	Cycle	14.5V~14.9V/77°F (25°C)
	Float	13.6V~13.8V/77°F (25°C)
Temperature compensation coefficient of charging voltage (mV/°C/cell)	Cycle	-4mV/°C/cell
	Float	-3mV/°C/cell

Discharge characteristics 77 °F (25 °C)

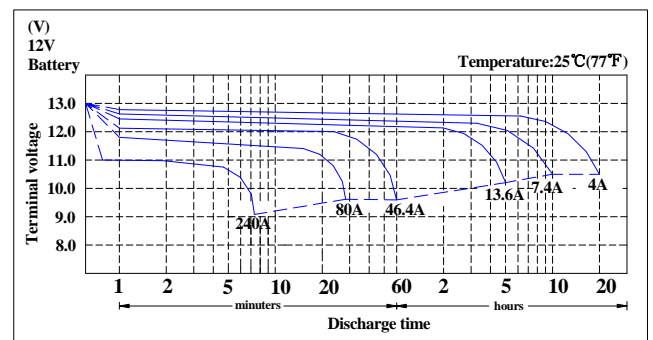

Duration of discharge vs. Discharge current

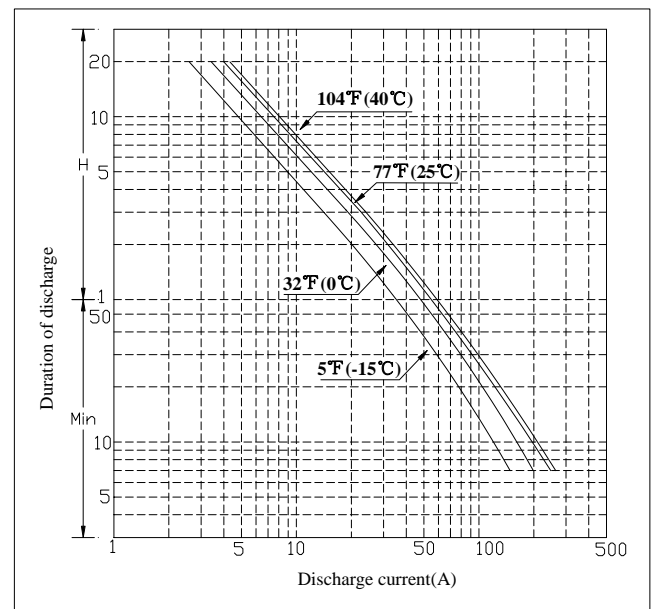

Constant Current Discharge Rating Amperes @ 77°F (25°C)

Cut off voltage V/cell	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	122	78	55.7	44.9	25.6	19.6	13.3	9.10	7.44	6.33	4.00	3.35

Note The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.

FULLRIVER

HGL BATTERIES

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specification are subject to modification without notice. Contact Fullriver for the latest information.